


TECHNICAL DATA

MODEL RSEX50085W

SUPREME EXPRESSIONS 500

Instant Electric Shower

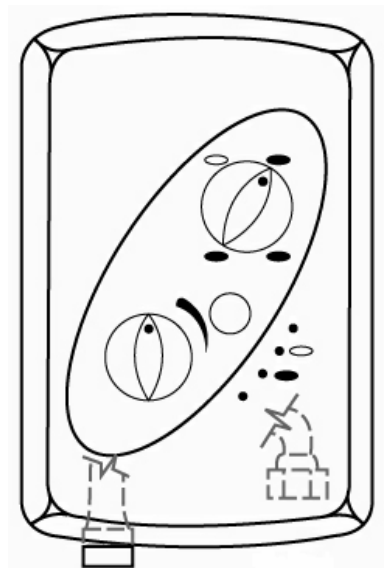

Rating	7.8—8.5 kW @ 220-240V.aC
Recommended Fuse	40 amps
Water Pressure	0.7-7bar (10-100 PSI)
Water Connection	15mm
Dimensions	190mm wide x 302mm high x 92mm deep
Weight	2.8kg
Colour	white
Warranty	backed by one year warranty
Standards	BEAB.CE.AS/NZ AS3498, AS4020
IP Rating	X4

FEATURES

- Fully temperature stabilized.
- Overheat protection.
- Electrical push button on/off for ease of use.
- Power on, high/low and overheat neon indicators.
- Neons combine to indicate lower pressure.
- Integral cold setting.
- Temperature/flow selection with single turn valve.
- New premium high quality multi-mode handset.
- Fully adjustable hand set holder.
- High flow convoluted hose.
- Soap dish with removable translucent insert for easy cleaning.
- Full fitting pack and instructions.
- High quality polar white finish.

SITE REQUIREMENTS

Shower to be permanently connected to the mains power supply via an isolating switch to comply with AS/NZS standards.

Cold water connections to include a separate insulating valve for maintenance, water pressure range of .07 - 10 bar.

While the unit has an integral strainer it is highly recommended that an external filter be fitted after the isolation valve.

.....

Supreme Expressions developed to provide the convenience of a push-button start/stop facility . A simple push on the button starts the shower at the pre-set power and flow rate reducing the amount of adjustment required. To stop the shower, press the button again and the power and flow rate settings remain set for your next shower.

.....



Penrice Supreme Products Ltd
PO Box 437, Cambridge, NZ
Ph (64) 7 823 5790
Ph 0800 SUPREME (787 736)
Fax (64) 7 823 5792

We reserve the right to alter specifications
and design without prior notice.
