


TECHNICAL DATA

MODEL RGRPI

SUPREME POWERSTREAM

Unvented Instantaneous Electric Water Heater

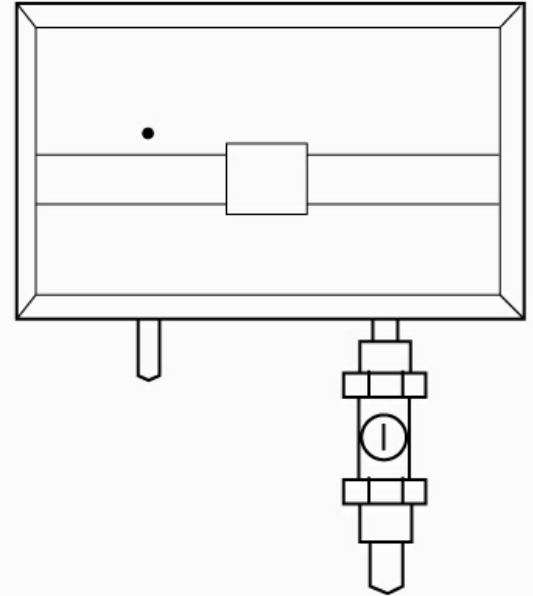

Rating	8.7- 9.5 kW @ 220-240V.AC
Recommended Fuse	40 amps
Water Pressure	1-10 bar
Water Connection	3/8" N.P.T adaptors supplied
Dimensions	307mm wide x 160mm high x 74mm deep
Weight	2.6kg
Colour	white
Warranty	backed by one year warranty
Standards	BEAB.CE.AS/NZ AS3498, AS4020
IP Rating	X4

FEATURES

- Water supplied to one or two outlets.
- Water outlet via existing tap or mixer (especially suitable via spray tap).
- Plumbs directly into cold water mains.
- Flexible mounting.
- Small compact shape.
- Remote fitting option.
- No standing heat losses.
- Fast response.
- Two heat settings.
- Neon 'power on' indicator.


FLOW RATE/PERFORMANCE - Winter/Summer

Model	4lts/min	5lts/min	6lts/min
9.5kW	39/54 °C	32/47 °C	28/42 °C

SITE REQUIREMENTS

- Shower to be permanently connected to the mains power supply via an isolating switch to comply with AS/NZS standards.
- Cold water connections to include a separate insulating valve for maintenance, water pressure range of 1 - 10 bar.
- While the unit has an integral strainer it is highly recommended that an external filter be fitted after the isolation valve.

Installation

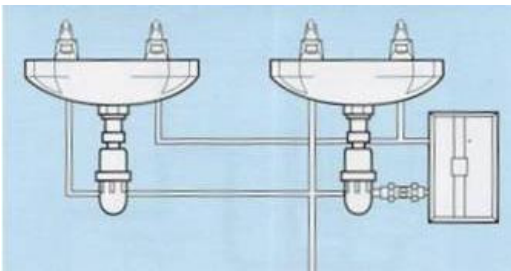

.....
Supreme Powerstream delivers instant hot water at point of use. This compact and unique design eliminates the need for centrally stored hot water cylinders saving on electrical usage and space.
.....



SUPREME PRODUCTS LIMITED

PO Box 437, Cambridge 3450, New Zealand

Tel: +64 7 823 5790 | Fax: +64 7 823 5792

Email: supreme@supreme.co.nz | Web: www.supreme.co.nz