


# TECHNICAL DATA

# MODEL BA101

## SUPREME HEAVY DUTY Automatic Hand Dryer 2kW

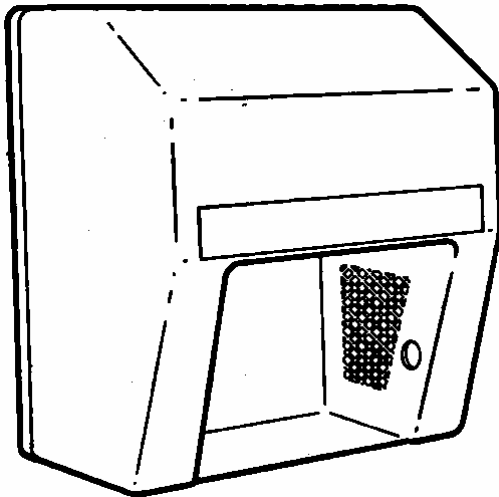

<b>Motor</b>	0.07kW, 7000rpm, tropic-proofed.
<b>Sound Levels</b>	65DB (A) @ 1.5m
<b>Fan</b>	Glass reinforced nylon flame retardant injection moulded, delivery 4.25 cubic meters air per minute.
<b>Element</b>	2.0kW, heavy duty, protected by a resettable cutout at 95°C, thermal fuse and vida flex to avoid overheating.
<b>Rating</b>	9.8 amps, 230/240V. Ac IPX2.
<b>Start-Stop</b>	Electronic, infra red sensor.
<b>Cover</b>	ABS/Polycarbonate blend.
<b>Dimensions</b>	320mm wide x 325mm high x 190mm deep.
<b>Weight</b>	3.8kg approx.
<b>Warranty</b>	Backed by a two year warranty.
<b>Standards</b>	IEC 60335-2-23, AS/NZ 3350.2.23 1997. BS EN 60335-2-23 1997. CISPR 14-1 2000.

### SAMPLE SPECIFICATION

*Supreme BA101 automatic Hand Dryer.*

#### General

Scope:- Supply and install Supreme BA101 automatic hand dryer as shown on the plans.

#### Materials

Primary Materials:- Supreme BA101 Automatic Hand Dryer complete with white ABS / Polycarbonate cover.

#### Workmanship

Remove Hand Dryer cover:- remove 2 x 6mm screws on the underside of the dryer. Lift lower part of the cover forward approximately 12mm then push cover upwards to unlatch top of cover from back plate. Position back plate on the wall with 320mm width to the top and height 325mm to the left side as you face the dryer.

**Washrooms** Recommended mounting height from floor varies, refer chart opposite.

Fasten dryer to the wall using 4 only wood screws or 6mm toggle bolts for steel framed walls or 6mm masonry anchors for masonry walls.

Electrical connection to be made by hard wiring back to an isolating switch mounted in a convenient position in accordance with Electrical Codes of Practice.


Plug sensor leads from cover to printed circuit board. Replace cover, latch top of cover onto back plate, ease bottom of cover into place and then replace the 2 only 6mm screws.

#### Completion

Leave work clean, remove all trade rubbish from the site and leave the hand dryer cleaned and in working order.

Pass over warranties/manuals (supplies 24 months material and workmanship guarantee) to the principal. Give maintenance instructions to principal.

### Mounting Back Plate

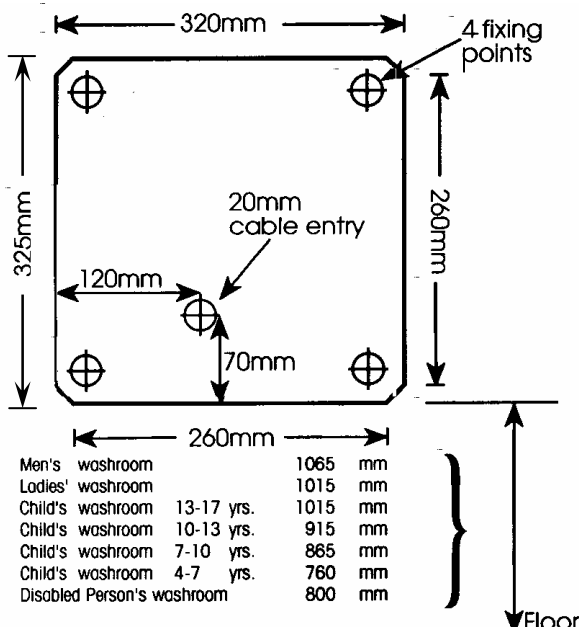

PO Box 437, Cambridge 3450, New Zealand

Tel: +64 7 823 5790 | Fax: +64 7 823 5792

Email: supreme@supreme.co.nz | Web: www.supreme.co.nz